Montageanleitung Adapterplatte

YAMAHA TENERE 700 (TÉNÉRÉ) (mit Schutzbügel) (2019 – 2020)

Lieferumfang

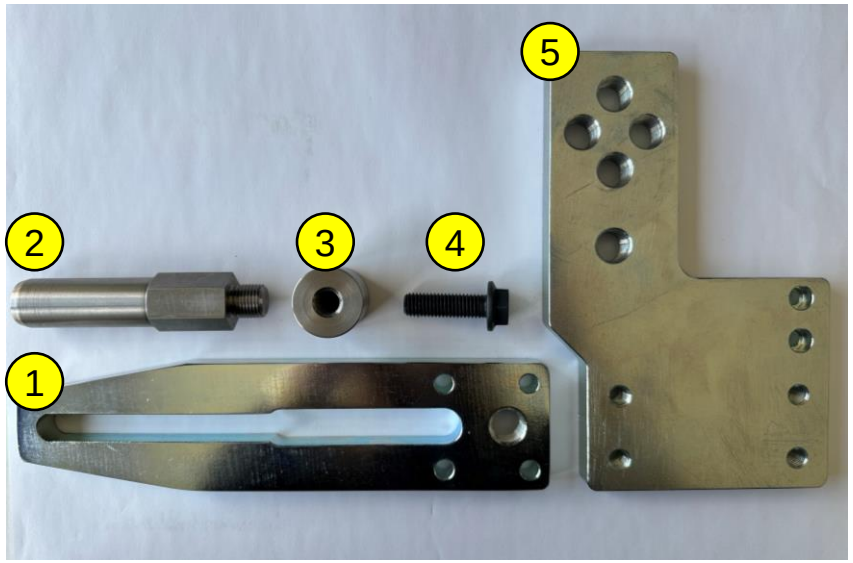

Hilfestellung:

Lege dir alle Teile so auf einem Blatt Papier aus und schreibe dir die Nummern auf das Blatt.

Die Nummern benötigst du im Nachgang, um die Teile zuzuordnen.

Pos.	Beschreibung	Anzahl
1	Adapterplatte	1
2	Pin oben	1
3	Pin unten	1
4	6-Kant, m. Flansch M12x40	1
5	Senkrecht erweiterte Grundplatte	1

Montage der Rahmenhülse am Motorrad

Aufnahmepunkte am Motorrad

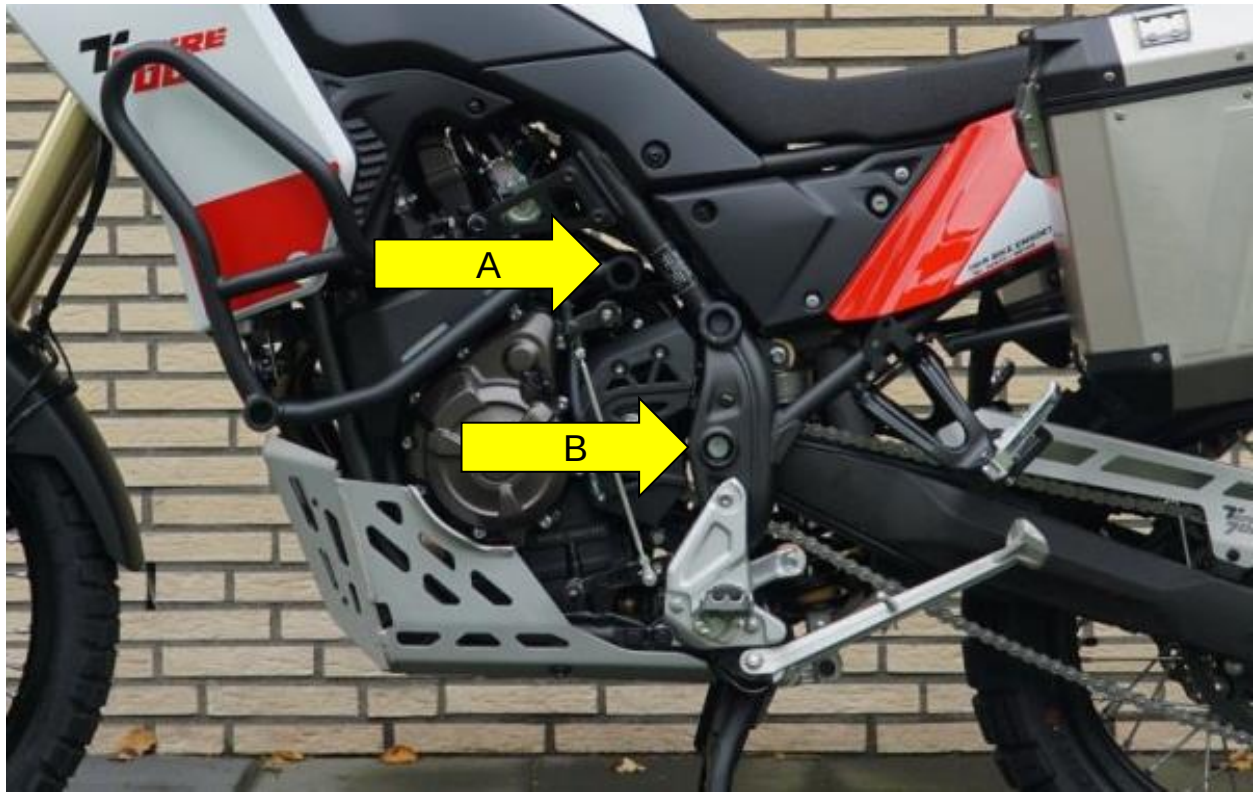

*Bild zeigt anderes Motorrad (Aufnahmepunkte/Prinzip ähnlich)

Punkt A:

Hier greift der obere Pin (2).

Punkt B:

Hier greift der untere Pin (3).

Montage Adapterplatte

Senkrecht erweiterte Grundplatte verbauen

Anstelle der standardmäßig mitgelieferten Grundplatte, die senkrecht erweiterte Grundplatte (5) am Zentralständer verbauen.

Montage Adapterplatte

Adapterplatte vormontieren

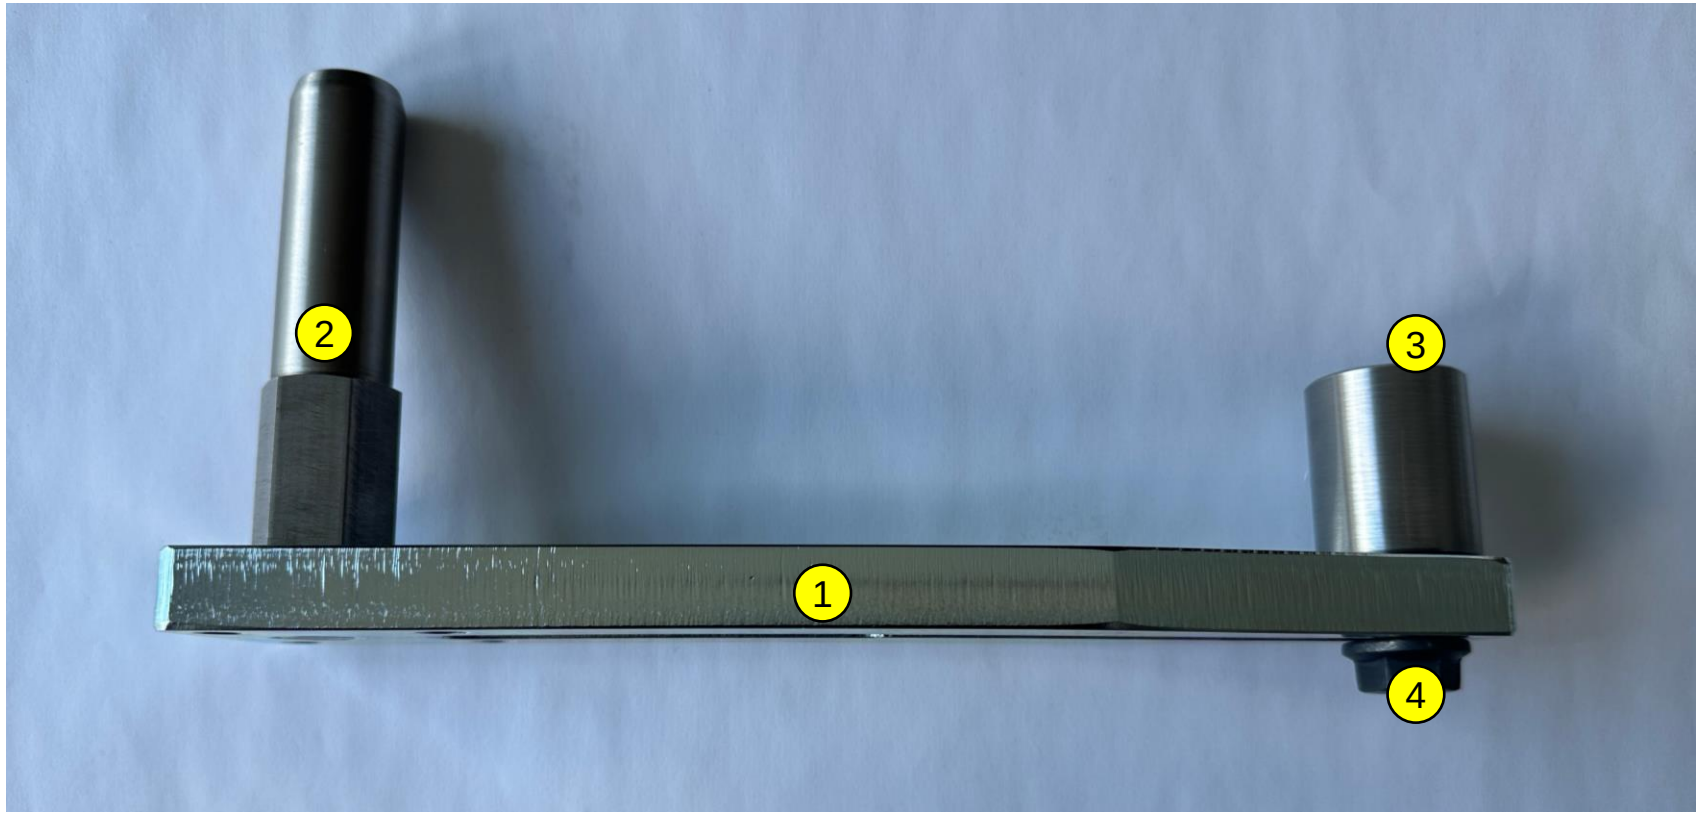

1. Den oberen Pin (2) an der Adapterplatte (1) verschrauben.

2. Den unteren Pin (3) mit der 6-Kant Schraube (4) an der Adapterplatte verschrauben, aber nicht festziehen.

Montage Adapterplatte

Adapterplatte fixieren

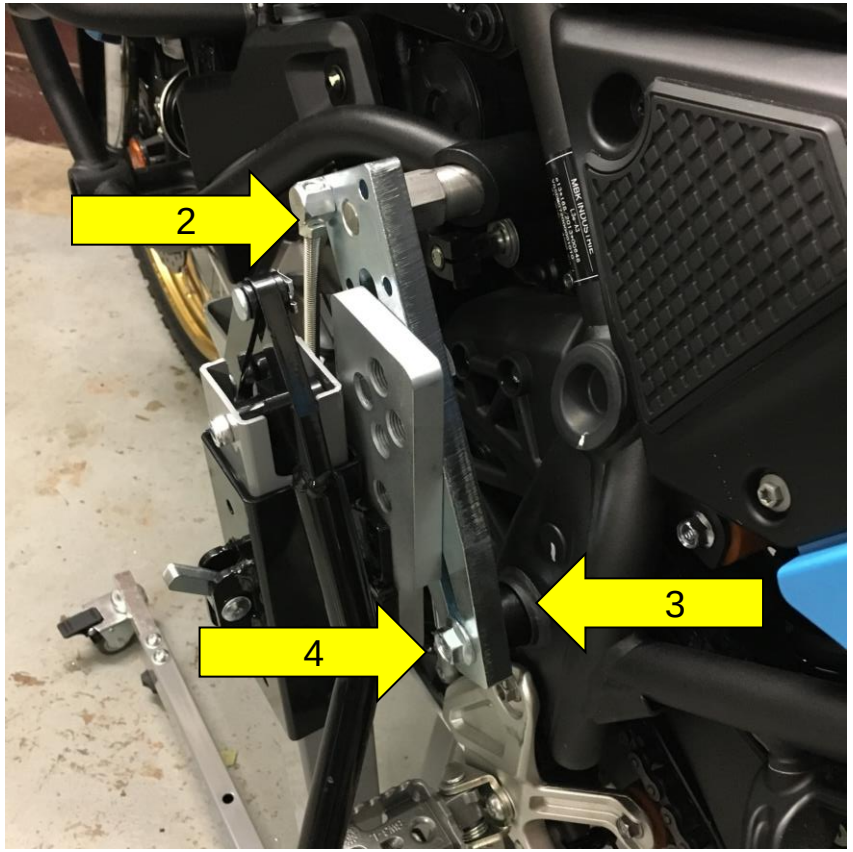

*Bild zeigt anderes Motorrad (Aufnahmepunkte/Prinzip ähnlich)

1. Die Adapterplatte mit dem oberen Pin (2) an das Motorrad stecken und den unteren Pin (3) ausrichten.

2. Den unteren Pin (3) mit der 6-Kant Schraube (4) festziehen.

Montage Adapterplatte

Adapterplatte am Zentralständer verschrauben

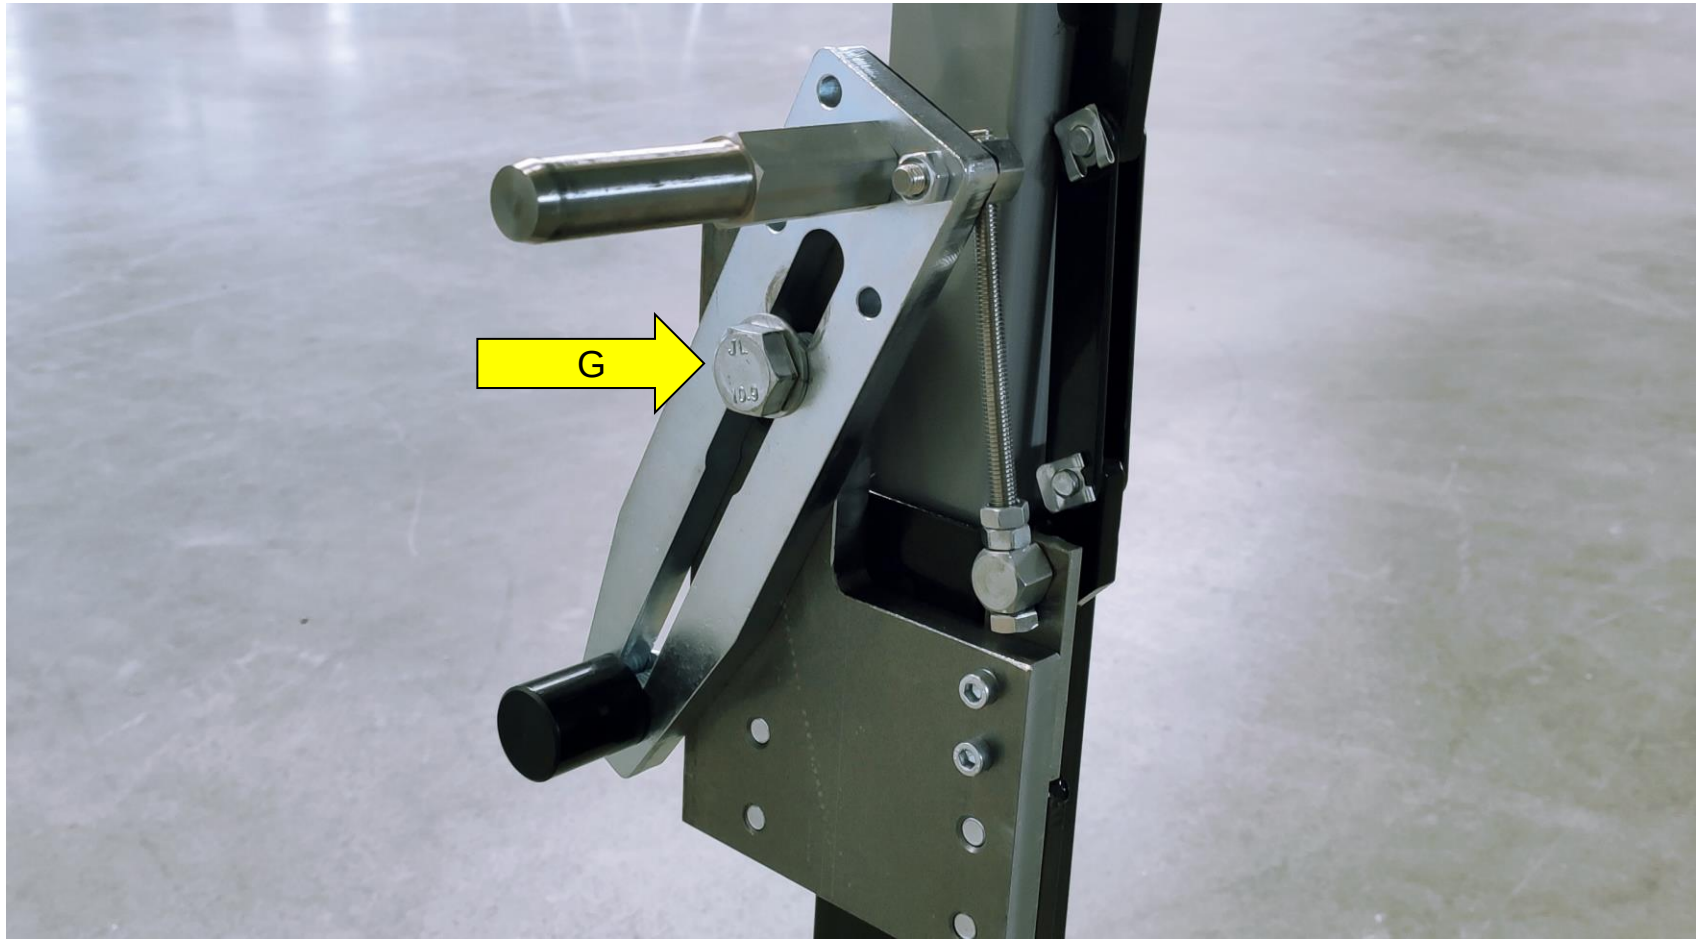

1. Neigungsverstellung (am Zentralständer vormontiert) an der Adapterplatte montieren, wie in der Abbildung dargestellt.
2. Adapterplatte an der Grundplatte (G) verschrauben, aber nicht anziehen, damit sich die Adapterplatte frei bewegen lässt.

Montage Adapterplatte

Adapterplatte ausrichten (1/3)

*Bild zeigt anderes Motorrad (Aufnahmepunkte/Prinzip ähnlich)

1. Den Zentralständer neben dem Motorrad und möglichst weit vorne positionieren. Dabei auf Kollision mit der Fußraste und dem Schalthebel achten.

2. Die beiden Pins einführen.

3. Die Adapterplatte an der Grundplatte verschrauben und anziehen (180 Nm).

Montage Adapterplatte

Adapterplatte ausrichten (2/3)

*Bild zeigt anderes Motorrad (Aufnahmepunkte/Prinzip ähnlich)

4. Alle Schrauben an der Neigungsverstellung und an der Adapterplatte anziehen.

WICHTIG:

Bei manchen Modellen wird der Ständer auf den Rollen, welche sich auf dem Boden befinden eingerollt.

Montage Adapterplatte

Adapterplatte ausrichten (3/3)

*Bild zeigt anderes Motorrad (Aufnahmepunkte/Prinzip ähnlich)

Bei einigen Modellen ist der Angriffspunkt des Zentralständers sehr dezentral in Richtung Hinterrad orientiert, weshalb das Gewicht des Motorrads nach vorne neigt.

Dies führt dazu, dass der Zentralständer eine größere negative Neigungsvoreinstellung benötigt und deshalb mit der Fußspitze leicht angehoben werden muss.

Hinweise

Erweiterte Grundplatte

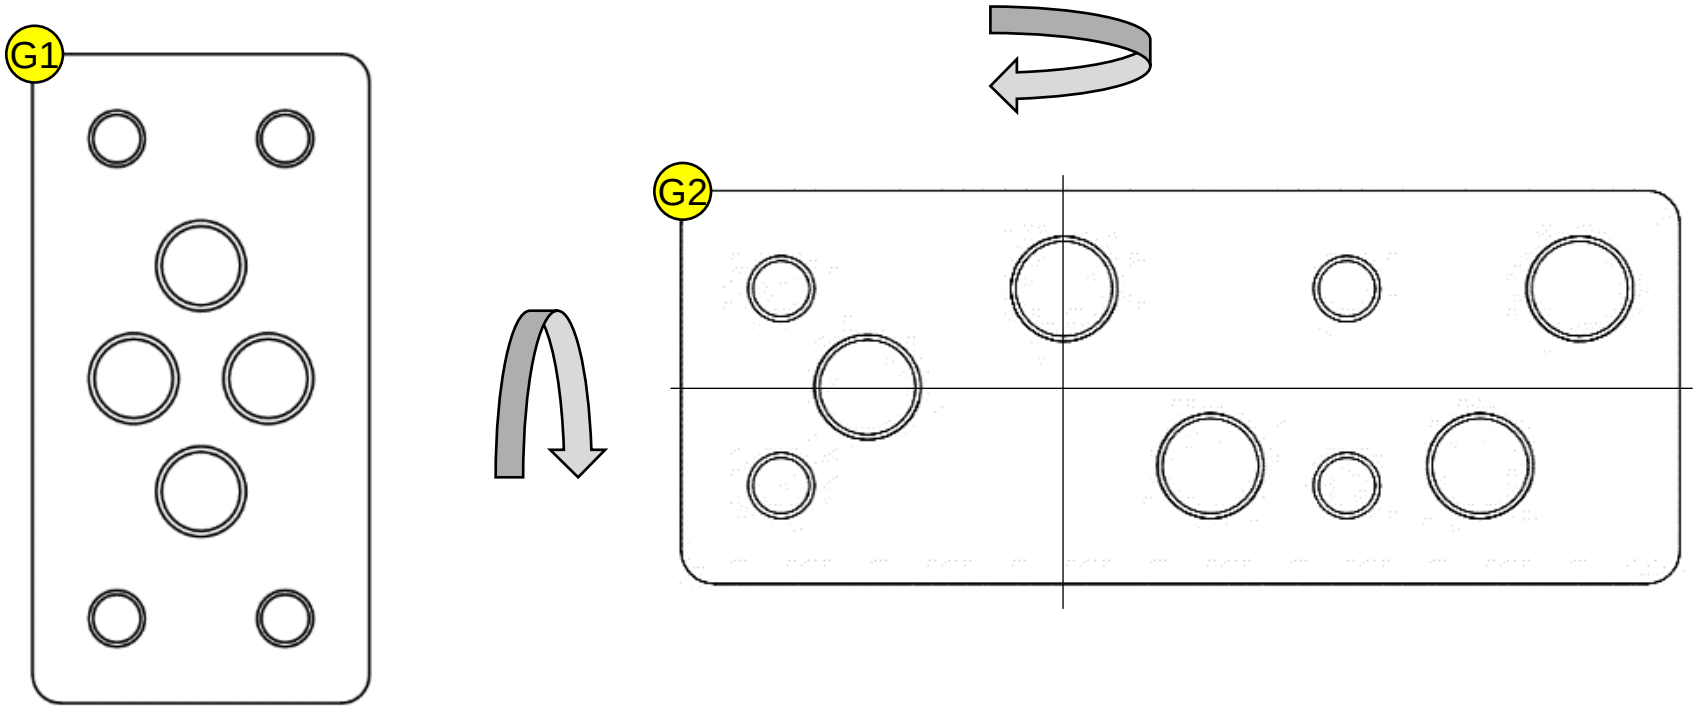

Für eine optimale Ausrichtung der Adapterplatte auf der Grundplatte G1, ist eine erweiterte Grundplatte G2 erhältlich.
Die erweiterte Grundplatte kann jeweils um 180° gedreht werden.

Hinweise

Neigungseinstellung

Damit das Motorrad mit beiden Rädern gleich vom Boden abhebt, muss die Neigung eingestellt werden.

Die Anleitung für die Neigungseinstellung finden Sie auf unserer Homepage.

User manual Adapter plate

YAMAHA TENERE 700 (TÉNÉRÉ) (with crash bar) (2019 – 2020)

Scope of delivery

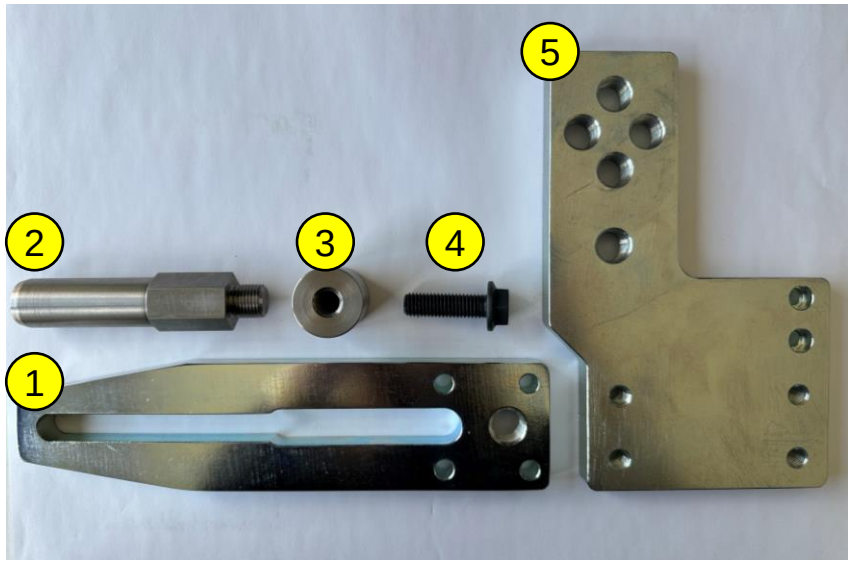

Help:

Lay out all the pieces on a sheet of paper and write the numbers on the sheet.

You will need the numbers to assign the pieces afterwards.

Pos.	Description	Quantity
1	Adapter plate	1
2	Upper pin	1
3	Lower pin	1
4	Hexagonal, w. flange M12x40	1
5	Vertically extended base plate	1

Fitting the frame sleeve to the motorcycle

Mounting points on the motorcycle

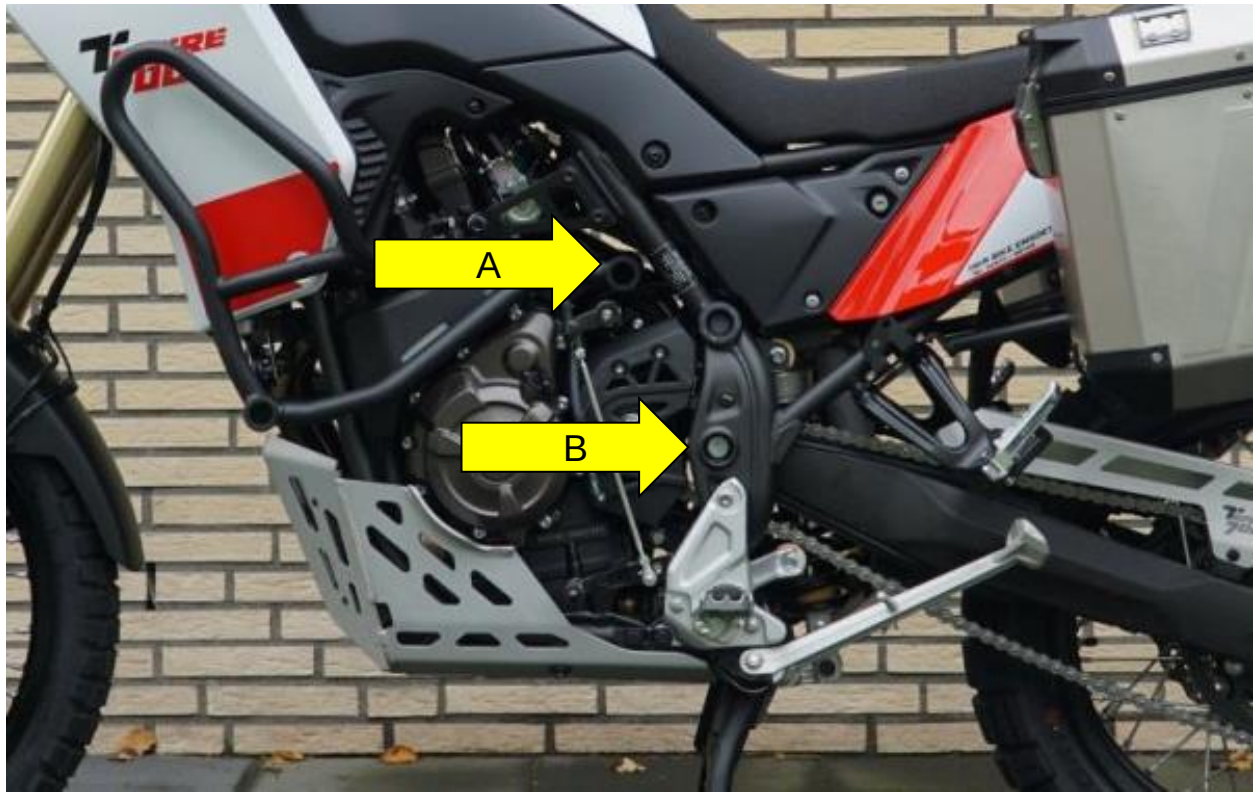

*Image shows a different motorcycle (mounting points/principle similar)

Point A:

The upper pin (2) engages here.

Point B:

The lower pin (3) engages here.

Fitting the frame sleeve to the motorcycle

Install the vertically extended base plate

*Image shows a different motorcycle (mounting points/principle similar)

Instead of the base plate supplied as standard, install the vertically extended base plate 5 on the central stand.

Mounting adapter plate

Pre-assemble the adapter plate

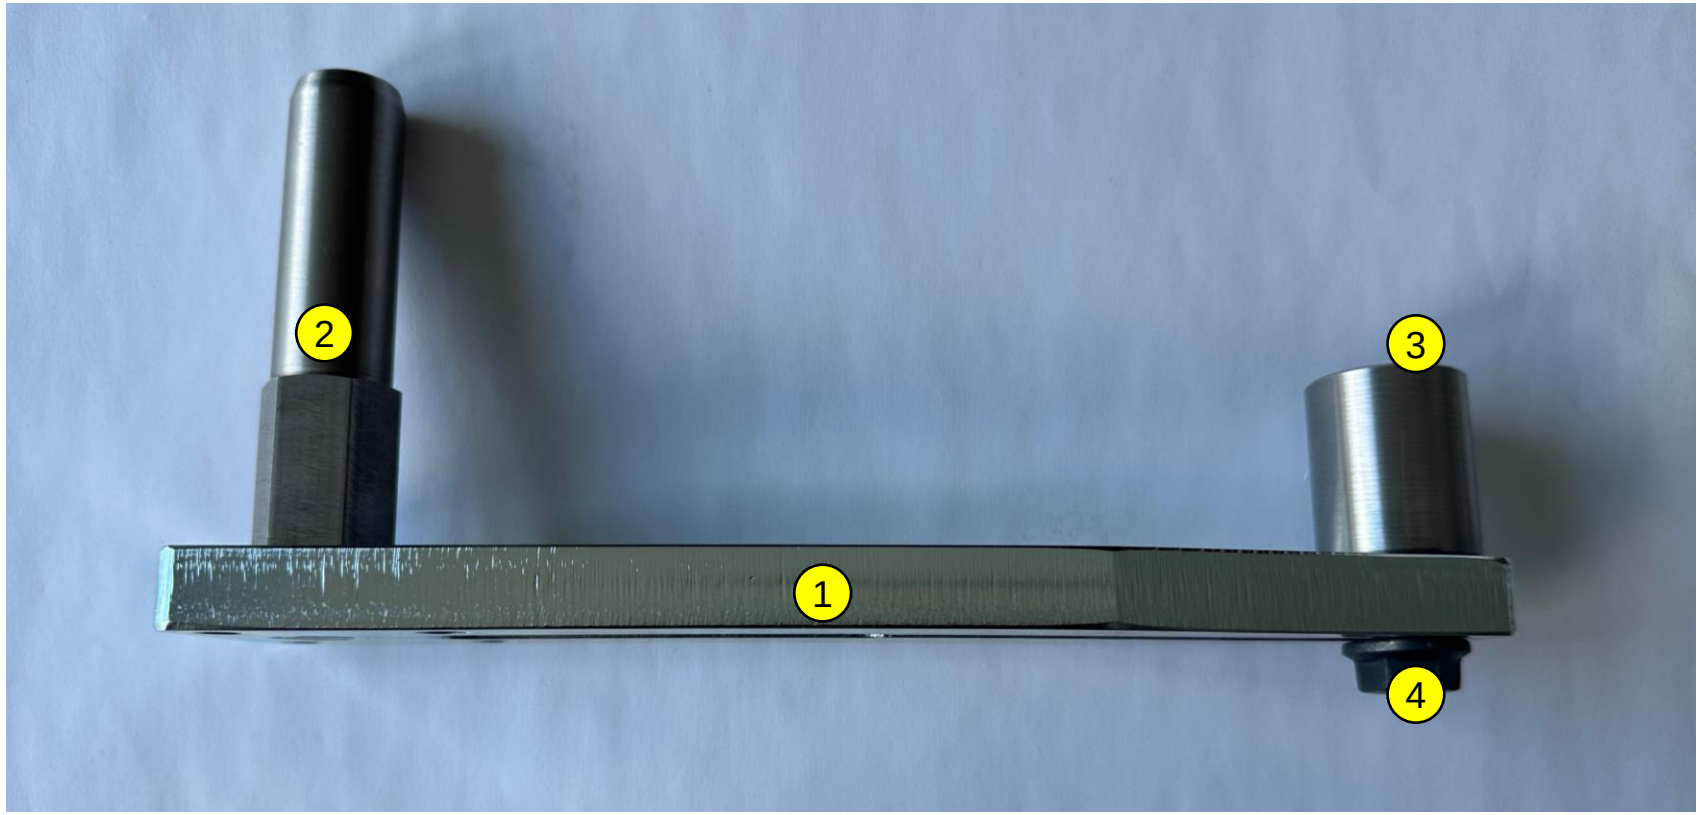

1. Screw the upper pin (2) to the adapter plate (1).

2. Screw the lower pin (3) to the adapter plate using the hexagonal (4), but do not tighten it.

Mounting adapter plate

Fix the adapter plate

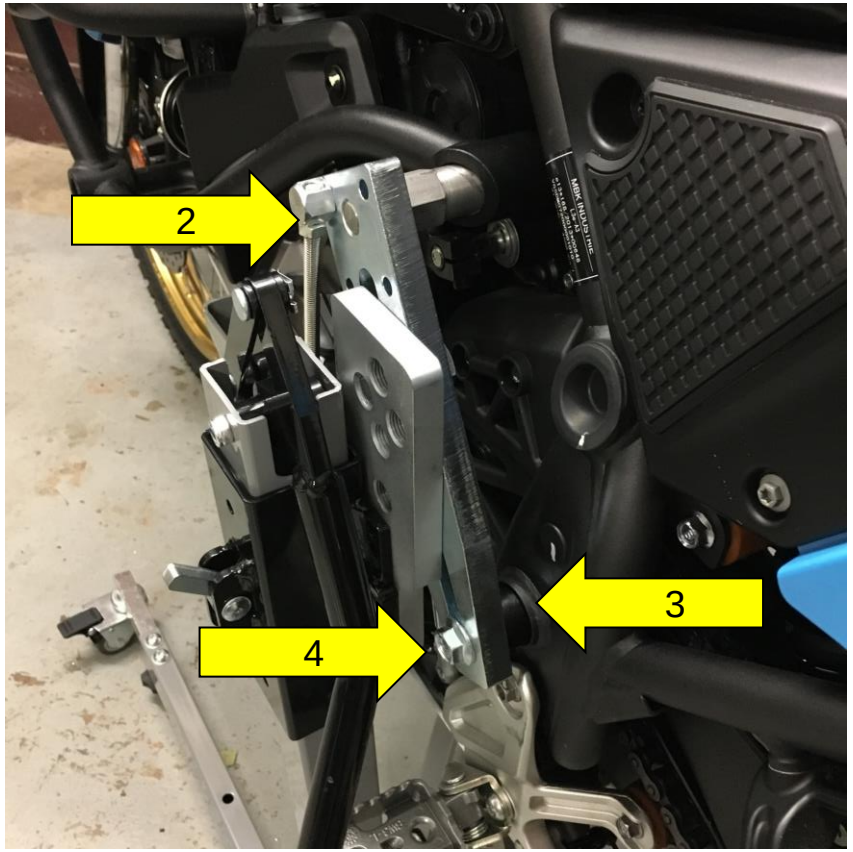

*Image shows a different motorcycle (mounting points/principle similar)

1. Attach the adapter plate to the motorcycle with the upper pin (2) and align the lower pin (3).

2. Tighten the lower pin (3) with the hexagonal (4).

Mounting adapter plate

Screw the adapter plate to the center stand

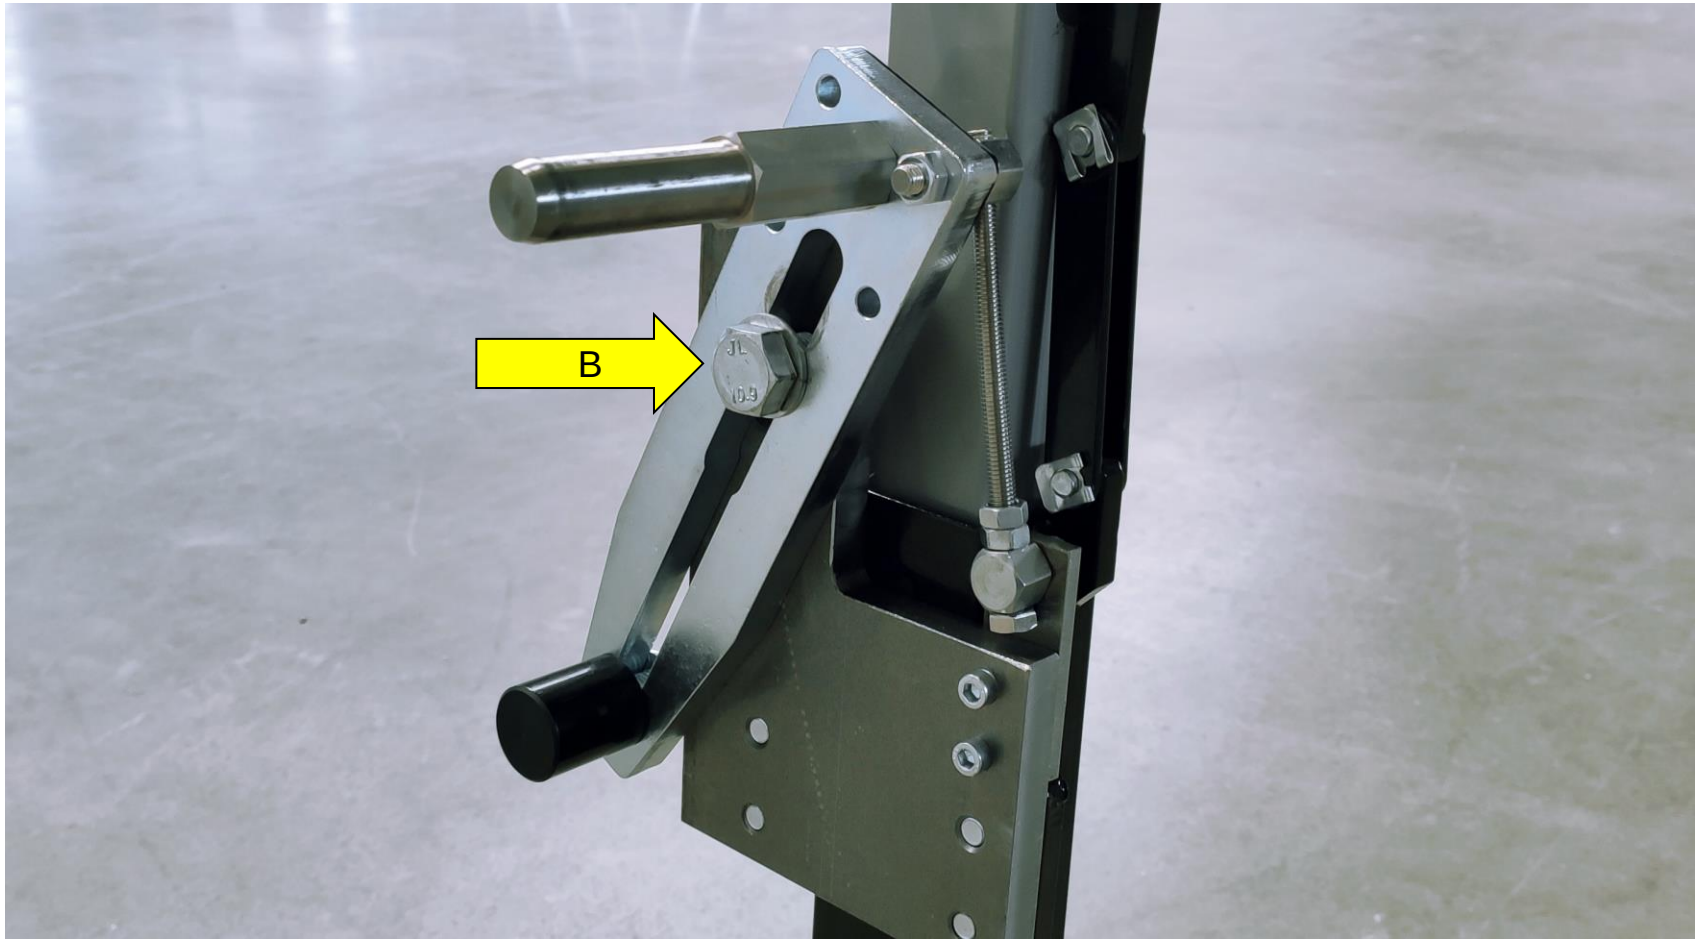

1. Mount the tilt adjustment (pre-assembled on the central stand) on the adapter plate as shown in the illustration.

2. Screw the adapter plate to the base plate (B), but do not tighten the screws so that the adapter plate can move freely.

Mounting adapter plate

Align the adapter plate (1/3)

*Image shows a different motorcycle (mounting points/principle similar)

1. Position the center stand next to the motorcycle and as far forward as possible. Watch out for collisions with the footrest and gearshift.
2. Insert the two pins.
3. Screw the adapter plate to the base plate and tighten (180 Nm).

Mounting adapter plate

Align the adapter plate (2/3)

*Image shows a different motorcycle (mounting points/principle similar)

4. Tighten all screws on the tilt adjustment and on the adapter plate.

IMPORTANT:

On some models, the stand is rolled up on the rollers, which are located on the ground.

Mounting adapter plate

Align the adapter plate (3/3)

*Image shows a different motorcycle (mounting points/principle similar)

On some models, the point of contact of the center stand is very decentralized towards the rear wheel, which is why the weight of the motorcycle leans forward.

This means that the center stand requires a larger negative tilt presetting and must therefore be lifted slightly with the tip of the foot.

Hints

Extended base plate

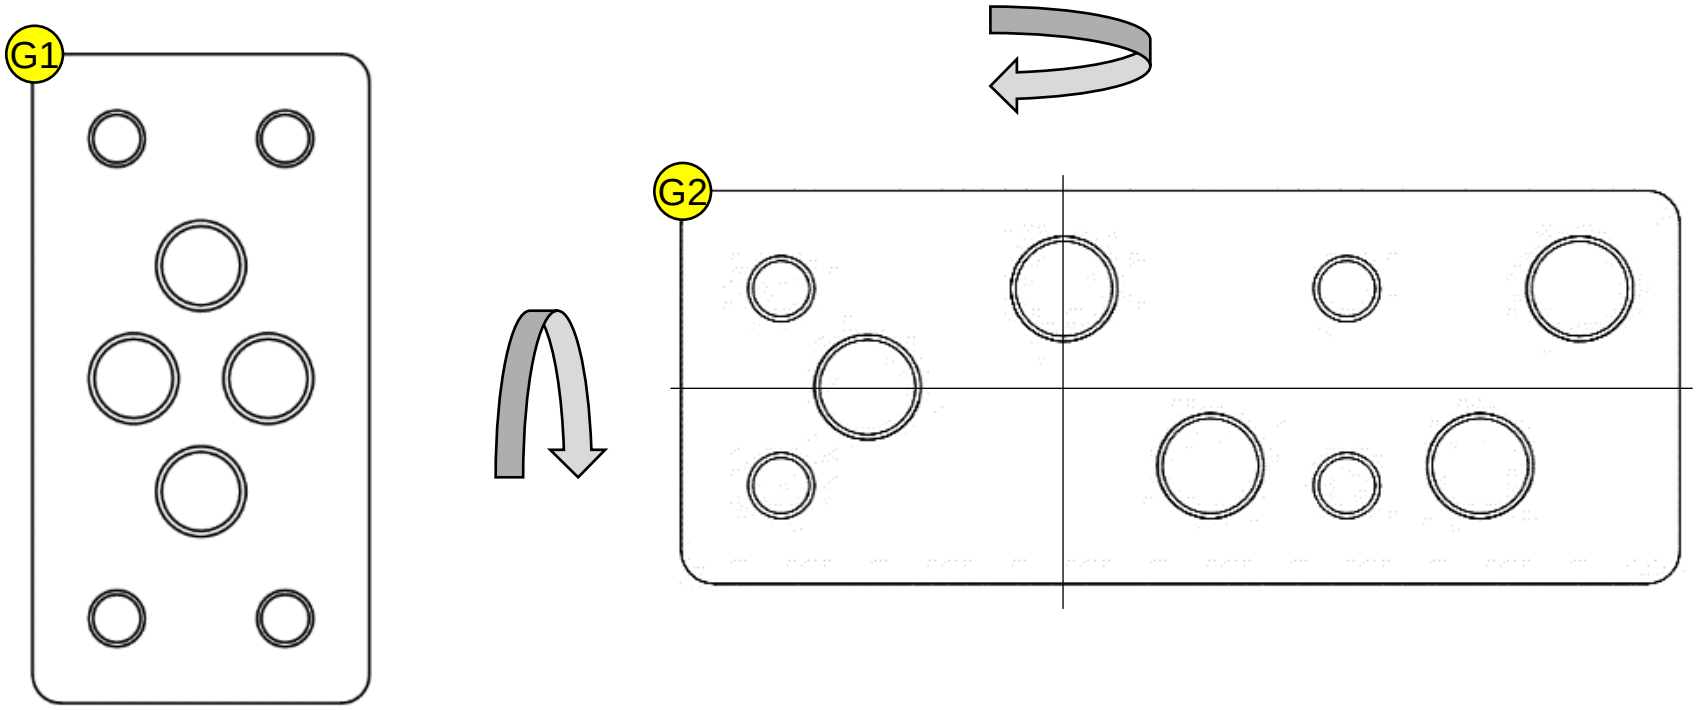

For optimum alignment of the adapter plate on the base plate G1, an extended base plate G2 is available; the extended base plate can be rotated by 180°.

Hints

Tilt adjustment

The tilt must be adjusted so that both wheels lift off the ground at the same time.

The instructions for adjusting the tilt can be found on our homepage.